


Press Male Adapter

Press x Male NPT | 21 Guardian SKUs | Dimensions in millimeters

CONSTRUCTION Copper	RAW MATERIAL STANDARD ASTM B75/B75M C12200 (TP2)
CONNECTION Press x Male NPT	CERTIFICATIONS NSF 372; NSF 61; IAPMO Z1117
MAXIMUM OPERATING PRESSURE 200 psi	OPERATING TEMPERATURE 0°-250 °F
SEAL / SERVICE EPDM / Potable water	

Engineering drawings

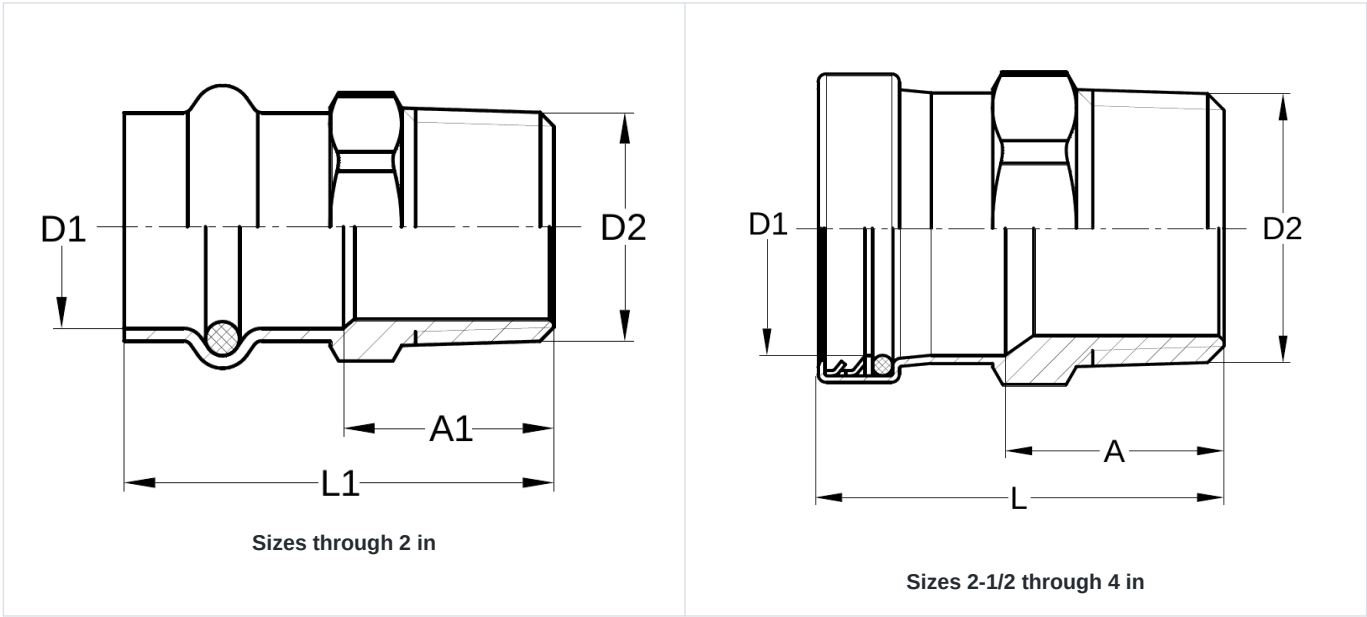

Press Male Adapter

Sizes, Guardian SKUs, dimensions, and weights

Size	SKU	L1 (mm)	A1 (mm)	Weight (lb)
1/2" x 3/8"	C0MA2117	42	21.5	0.1
1/2"	C0MA2121	43	22.5	0.11
1/2" x 3/4"	C0MA2127	45	24.5	0.15
3/4" x 1/2"	C0MA2721	48	24	0.15
3/4"	C0MA2727	48	24	0.16
3/4" x 1"	C0MA2733	52	28	0.26
1" x 1/2"	C0MA3321	48	30	0.24
1" x 3/4"	C0MA3327	49	25	0.23
1"	C0MA3333	49	25	0.25
1" x 1-1/4"	C0MA3342	53	29	0.42
1-1/4" x 1"	C0MA4233	56	27	0.37
1-1/4"	C0MA4242	56	27	0.38
1-1/4" x 1-1/2"	C0MA4248	58	29	0.54
1-1/2" x 1-1/4"	C0MA4842	65	31.5	0.54
1-1/2"	C0MA4848	67	30	0.56
1-1/2" x 2"	C0MA4860	67	30	0.87
2" x 1-1/2"	C0MA6048	72	31	0.68
2"	C0MA6060	71	30	0.75
2-1/2"	C0MA7373	96	53	1.28
3"	C0MA8989	105	55	1.85
4"	C0MAA4A4	119	59	2.95