


Press Reducing Coupling

Press x Press | 12 Guardian SKUs | Dimensions in millimeters


CONSTRUCTION Copper	RAW MATERIAL STANDARD ASTM B75/B75M C12200 (TP2)
CONNECTION Press x Press	CERTIFICATIONS NSF 372; NSF 61; IAPMO Z1117
MAXIMUM OPERATING PRESSURE 200 psi	OPERATING TEMPERATURE 0°-250 °F
SEAL / SERVICE EPDM / Potable water	

Engineering drawings

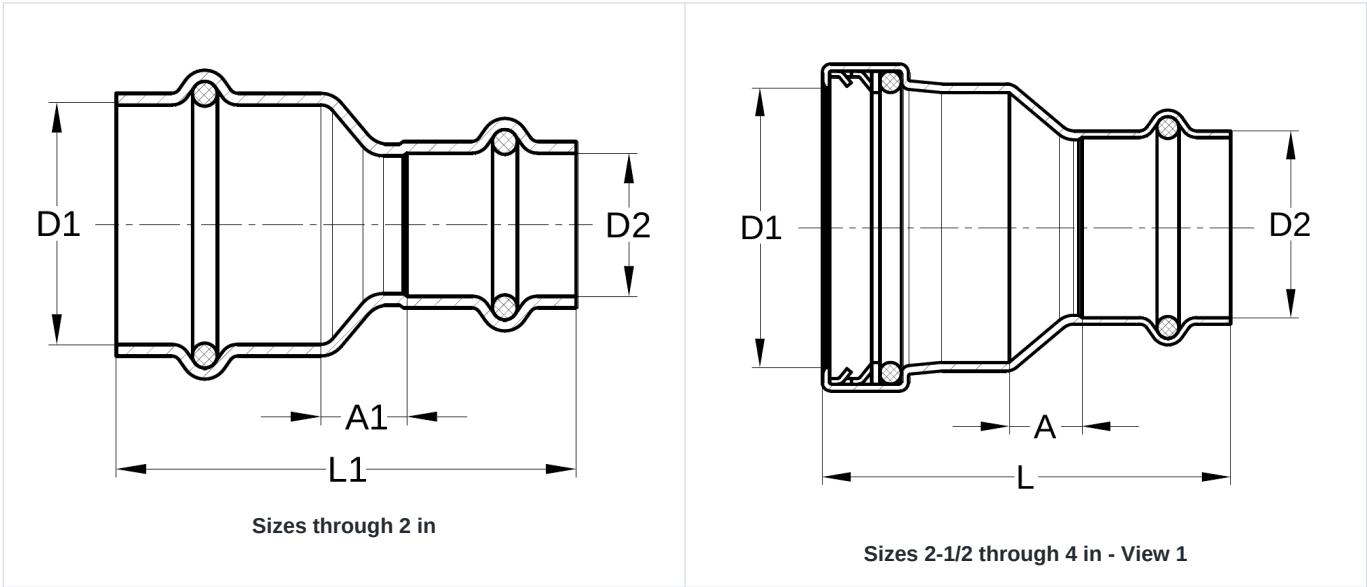

Press Reducing Coupling

Additional engineering view

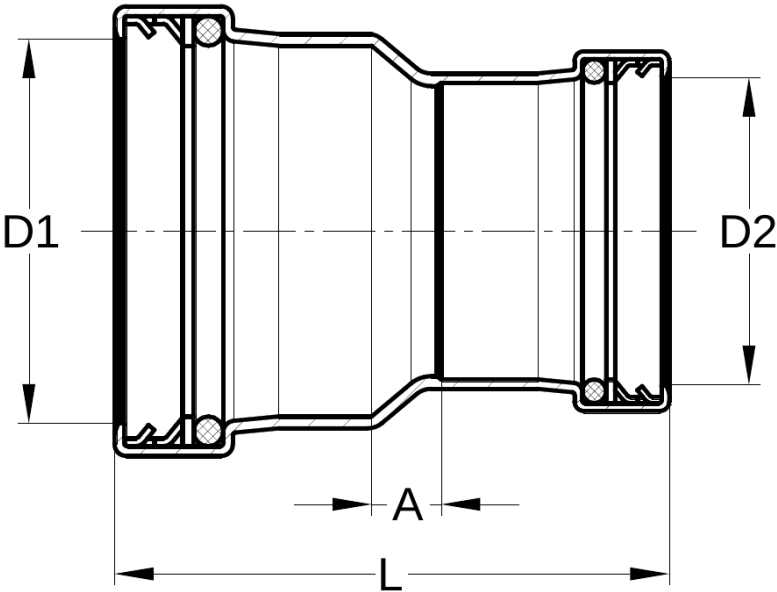

Sizes 2-1/2 through 4 in - View 2

Press Reducing Coupling

Sizes, Guardian SKUs, dimensions, and weights

Size	SKU	L1 (mm)	A1 (mm)	Weight (lb)
3/4" x 1/2"	C0RC2721	53.5	9	0.12
1" x 3/4"	C0RC3327	57	9	0.17
1-1/4" x 1"	C0RC4233	63.5	10.5	0.24
1-1/2" x 1-1/4"	C0RC4842	78	12	0.4
2" x 1-1/4"	C0RC6042	91	21	0.52
2" x 1-1/2"	C0RC6048	95.5	17.5	0.62
2-1/2" x 2"	C0RC7360	108	25	0.95
3" x 2"	C0RC8960	121.5	31.5	1.25
3" x 2-1/2"	C0RC8973	118	25	1.34
4" x 2"	C0RCA460	143.5	43.5	2.13
4" x 2-1/2"	C0RCA473	140	37	2.18
4" x 3"	C0RCA489	140.5	30.5	2.29