


Press Female Branch Tee

Press x Press x Female NPT | 12 Guardian SKUs | Dimensions in millimeters

CONSTRUCTION Copper	RAW MATERIAL STANDARD ASTM B75/B75M C12200 (TP2)
CONNECTION Press x Press x Female NPT	CERTIFICATIONS NSF 372; NSF 61; IAPMO Z1117
MAXIMUM OPERATING PRESSURE 200 psi	OPERATING TEMPERATURE 0°-250 °F
SEAL / SERVICE EPDM / Potable water	

Engineering drawings

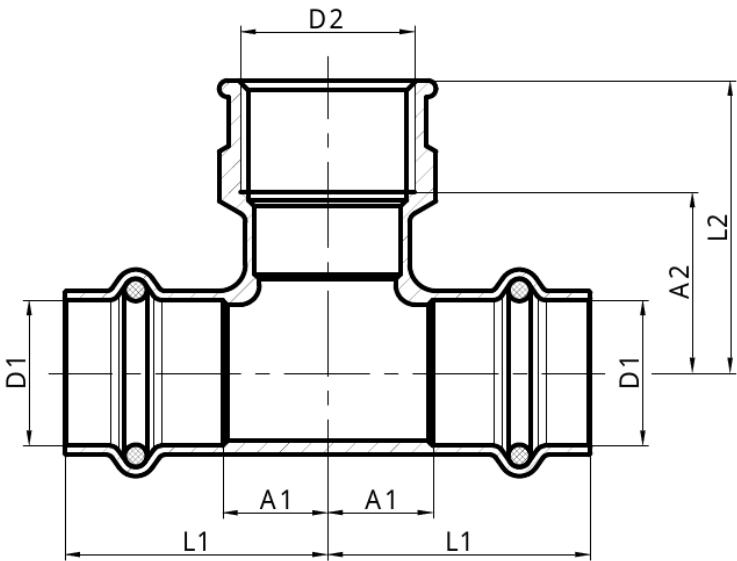

Engineering drawing

Press Female Branch Tee

Sizes, Guardian SKUs, dimensions, and weights

Size	SKU	L1 (mm)	A1 (mm)	L2 (mm)	A2 (mm)	Weight (lb)
1/2" x 1/2" x 1/2"	C0FE2121	39.5	19	36.5	22.5	0.25
3/4" x 3/4" x 1/4"	C0FE2714	41.5	17.5	34	23.5	0.3
3/4" x 3/4" x 1/2"	C0FE2721	45.5	21.5	35.5	21.5	0.35
3/4" x 3/4" x 3/4"	C0FE2727	45.5	21.5	41.5	25.5	0.37
1" x 1" x 1/2"	C0FE3321	45.5	21.5	43.5	29.5	0.43
1" x 1" x 3/4"	C0FE3327	48.5	24.5	47	31	0.56
1-1/4" x 1-1/4" x 1/2"	C0FE4221	47.5	18.5	42.5	28.5	0.53
1-1/4" x 1-1/4" x 3/4"	C0FE4227	50.5	21.5	46	30	0.6
1-1/2" x 1-1/2" x 1/2"	C0FE4821	54	17	46.5	32.5	0.79
1-1/2" x 1-1/2" x 3/4"	C0FE4827	57.5	20.5	50	34	0.9
2" x 2" x 1/2"	C0FE6021	64.5	23.5	53	39	1.05
2" x 2" x 3/4"	C0FE6027	64.5	23.5	58.5	42.5	1.11