


Press Female Adapter

Press x Female NPT | 18 Guardian SKUs | Dimensions in millimeters

CONSTRUCTION Copper	RAW MATERIAL STANDARD ASTM B75/B75M C12200 (TP2)
CONNECTION Press x Female NPT	CERTIFICATIONS NSF 372; NSF 61; IAPMO Z1117
MAXIMUM OPERATING PRESSURE 200 psi	OPERATING TEMPERATURE 0°-250 °F
SEAL / SERVICE EPDM / Potable water	

Engineering drawings

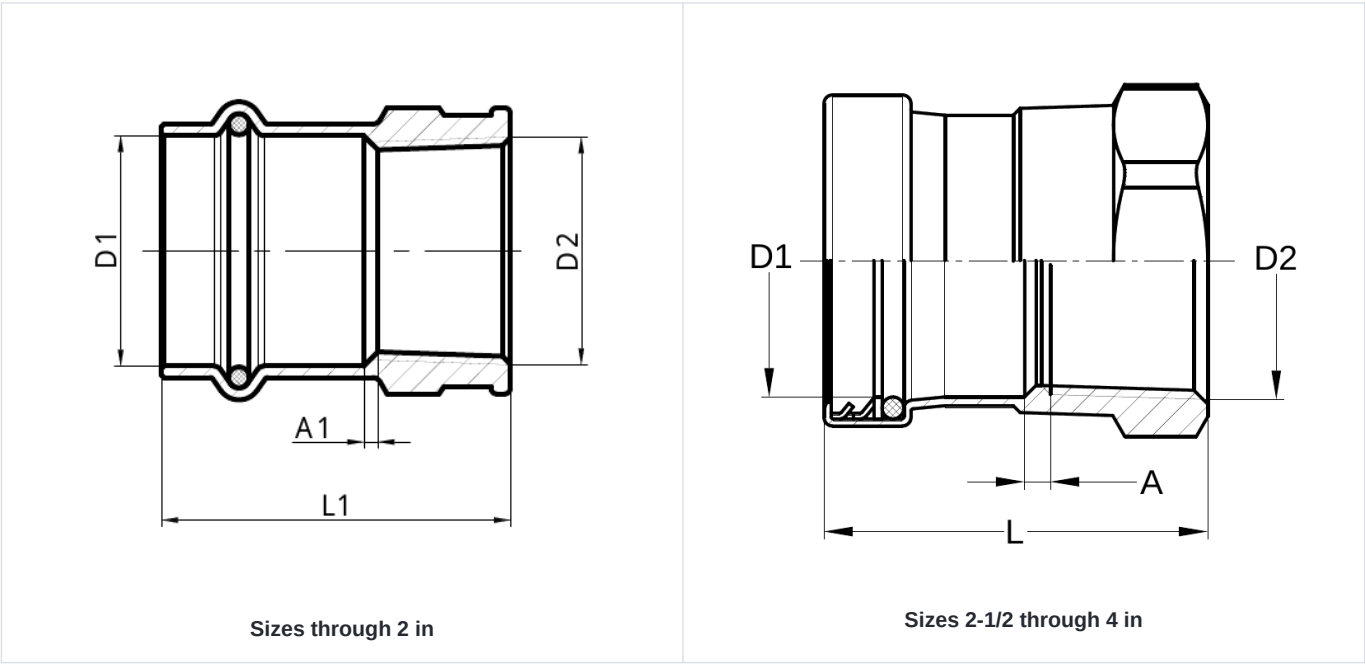

Press Female Adapter

Sizes, Guardian SKUs, dimensions, and weights

Size	SKU	L1 (mm)	A1 (mm)	Weight (lb)
1/2" x 3/8"	C0FA2117	36	9	0.1
1/2"	C0FA2121	41	7	0.12
1/2" x 3/4"	C0FA2127	42	5.5	0.17
3/4" x 1/2"	C0FA2721	41	4.5	0.17
3/4"	C0FA2727	46	5.5	0.2
1" x 1/2"	C0FA3321	53	14.5	0.26
1" x 3/4"	C0FA3327	44	3.5	0.25
1"	C0FA3333	48	5	0.27
1" x 1-1/4"	C0FA3342	54	8	0.41
1-1/4" x 1"	C0FA4233	53	4	0.36
1-1/4"	C0FA4242	56	6	0.41
1-1/4" x 1-1/2"	C0FA4248	56	5.5	0.51
1-1/2" x 1-1/4"	C0FA4842	63	6	0.58
1-1/2"	C0FA4848	64	5.5	0.59
2"	C0FA6060	72	5.5	0.78
2-1/2"	C0FA7373	91	25	1.54
3"	C0FA8989	100	24.5	2.31
4"	C0FAA4A4	111	23	2.77