


Press Bushing Reducer

Fitting x Press | 13 Guardian SKUs | Dimensions in millimeters

CONSTRUCTION Copper	RAW MATERIAL STANDARD ASTM B75/B75M C12200 (TP2)
CONNECTION Fitting x Press	CERTIFICATIONS NSF 372; NSF 61; IAPMO Z1117
MAXIMUM OPERATING PRESSURE 200 psi	OPERATING TEMPERATURE 0°-250 °F
SEAL / SERVICE EPDM / Potable water	

Engineering drawings

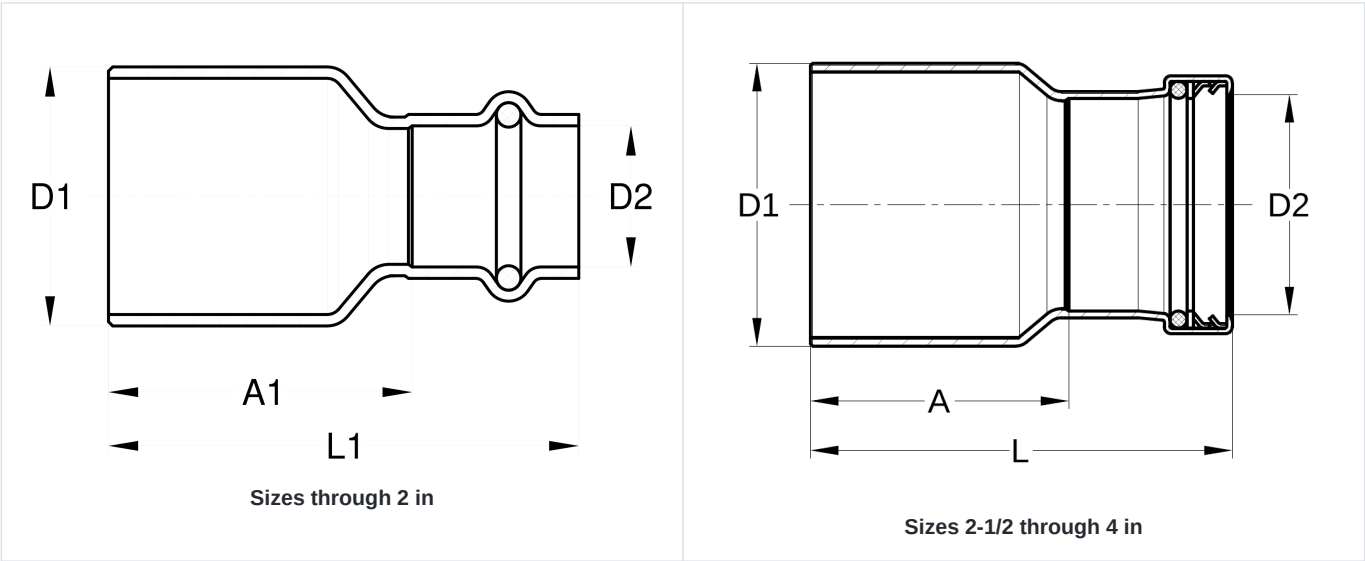

Press Bushing Reducer

Sizes, Guardian SKUs, dimensions, and weights

Size	SKU	L1 (mm)	A1 (mm)	Weight (lb)
3/4" x 1/2"	C0WR2721	54.5	34	0.1
1" x 3/4"	C0WR3327	57	33	0.15
1-1/4" x 1"	C0WR4233	64	40	0.21
1-1/2" x 1"	C0WR4833	75	51	0.29
1-1/2" x 1-1/4"	C0WR4842	77	48	0.32
2" x 1-1/4"	C0WR6042	91	62	0.46
2" x 1-1/2"	C0WR6048	94	57	0.54
2-1/2" x 2"	C0WR7360	108	67	0.84
3" x 2"	C0WR8960	122	81	1.12
3" x 2-1/2"	C0WR8973	115	72	1.21
4" x 2"	C0WRA460	157	116	2
4" x 2-1/2"	C0WRA473	147	104	1.98
4" x 3"	C0WRA489	145	95	2.09