


Press Dielectric Female Union

Press x Female NPT | 6 Guardian SKUs | Dimensions in millimeters

CONSTRUCTION Copper + Iron	RAW MATERIAL STANDARD ASTM B75/B75M C12200 (TP2); ASTM A108 1020
CONNECTION Press x Female NPT	CERTIFICATIONS NSF 372; NSF 61; IAPMO Z1117
MAXIMUM OPERATING PRESSURE 200 psi	OPERATING TEMPERATURE 0°-250 °F
SEAL / SERVICE EPDM / Potable water	

Engineering drawings

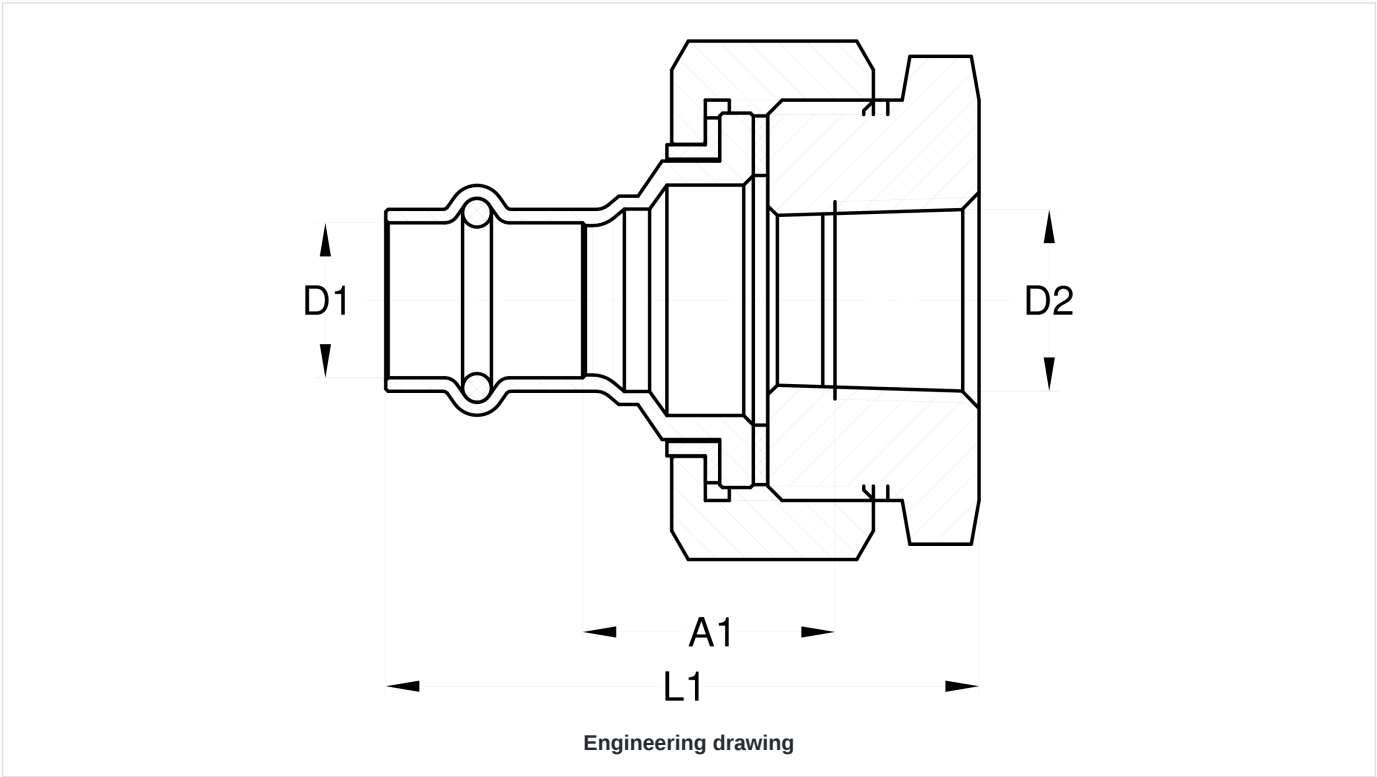

Press Dielectric Female Union

Sizes, Guardian SKUs, dimensions, and weights

Size	SKU	L1 (mm)	A1 (mm)	Weight (lb)
1/2"	C0SU2121	67	33.5	0.83
3/4"	C0SU2727	78	39	1.14
1"	C0SU3333	70	29	1.08
1-1/4"	C0SU4242	77	28	1.66
1-1/2"	C0SU4848	88	31	1.98
2"	C0SU6060	96	31	2.92