


Press Adapter Flange

Press x Bolted Flange | 7 Guardian SKUs | Dimensions in millimeters

CONSTRUCTION Copper + Iron	RAW MATERIAL STANDARD ASTM B75/B75M C12200 (TP2); ASTM A283-C
CONNECTION Press x Bolted Flange	CERTIFICATIONS NSF 372; NSF 61; IAPMO Z1117
MAXIMUM OPERATING PRESSURE 200 psi	OPERATING TEMPERATURE 0°-250 °F
SEAL / SERVICE EPDM / Potable water	

Engineering drawings

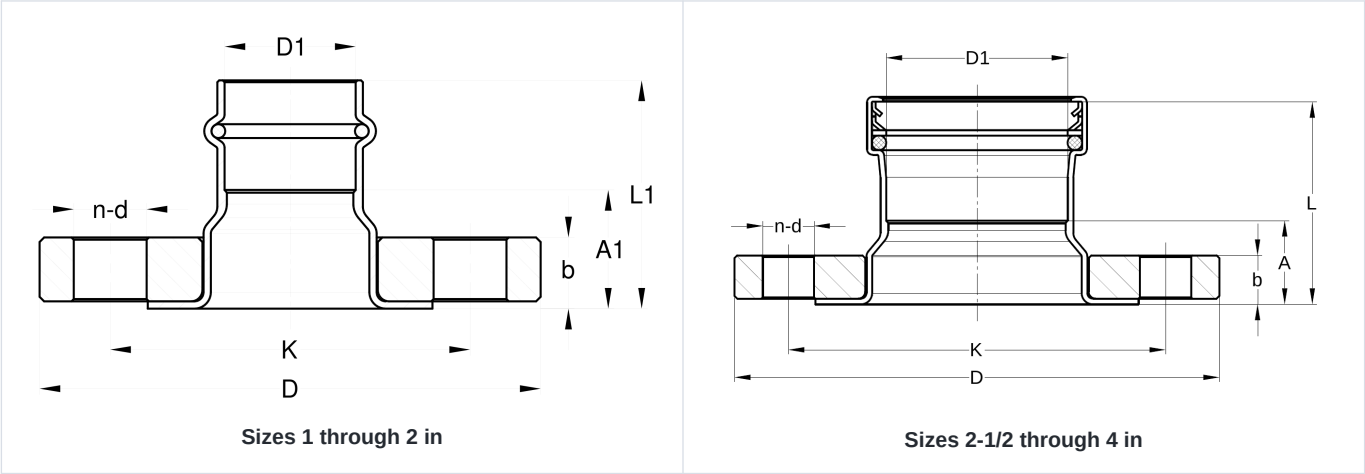

Press Adapter Flange

Sizes, Guardian SKUs, dimensions, and weights

Size	SKU	L1 (mm)	A1 (mm)	b (mm)	D (mm)	K (mm)	n	d (mm)	Weight (lb)
1"	C0AF3333	58	34	14	110	79	4	16	2.08
1-1/4"	C0AF4242	58	29	14	115	89	4	16	2.12
1-1/2"	C0AF4848	66	29	14	125	98	4	16	2.63
2"	C0AF6060	70	29	14	150	121	4	19	3.76
2-1/2"	C0AF7373	72	28	15	180	140	4	19	5.59
3"	C0AF8989	85	34	18	190	152	4	19	7.17
4"	C0AFA4A4	95	34	20	230	191	8	19	11.24