


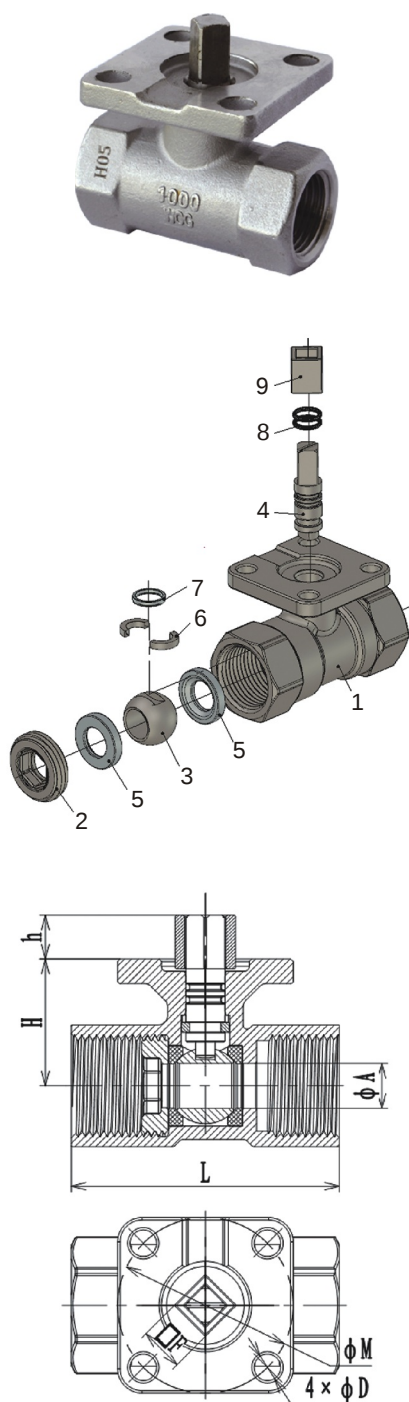

Features:

Pressure: 1000PSI

Lost wax precision casting

ISO5211 mounting pad

Blow-out proof stem

Lockable handle

Castings approved AD2000-WO certificate

Thread: ASME B1.20.1

Inspection: API598

Valve Material Option: CF8/CF8M

Seal Material Option: PTFE/PTFE+15% Glass Fiber/PTFE+25%Carbon/TFM1600 and so on

No.	Item	Qty	Material	
			316	304
1	Body	1	A351-CF8M	A351-CF8
2	Cap	1	A351-CF8M	A351-CF8
3	Ball	1	A182-F316	A182-F304
4	Stem	1	A276-316	A276-304
5	Seat	2	PTFE/RPTFE/CTFE	
6	Split collar (1/4-3/4)	2	316	
7	Gasket	1	PTFE	
8	O-ring	2	Viton/NBR	
9	Sleeve (3/8-1/2)	1	Q235+Zn	

Q071N04 Series

Size (In)	Product Code		Dimension							
	304	316	A	H	h	L	D	M	F	ISO5211
1/4	04Q071N04014	06Q071N04014	0.276	0.96	0.35	1.69	0.26	1.42	0.35	F03
3/8	04Q071N04038	06Q071N04038	0.276	0.96	0.35	1.77	0.26	1.42	0.35	F03
1/2	04Q071N04012	06Q071N04012	0.362	1.02	0.35	2.17	0.26	1.42	0.35	F03
3/4	04Q071N04034	06Q071N04034	0.492	1.26	0.35	2.36	0.26	1.42	0.35	F03
1	04Q071N04010	06Q071N04010	0.591	1.38	0.35	2.87	0.26	1.42	0.35	F03
1 1/4	04Q071N04114	06Q071N04114	0.787	1.50	0.35	3.07	0.26	1.42	0.35	F03
1 1/2	04Q071N04112	06Q071N04112	0.984	1.65	0.43	3.50	0.28	1.97	0.43	F05
2	04Q071N04020	06Q071N04020	1.260	1.97	0.43	3.94	0.28	1.97	0.43	F05