



Features:

Pressure: 1000PSI

Lost wax precision casting

Blow-out proof stem Lockable handle


Castings approved AD2000-WO certificate

Sanitary design

Thread: ASME B 1.20.1

Inspection: API598

Connection Option: Female/Female; Male/Male;
Female/Male

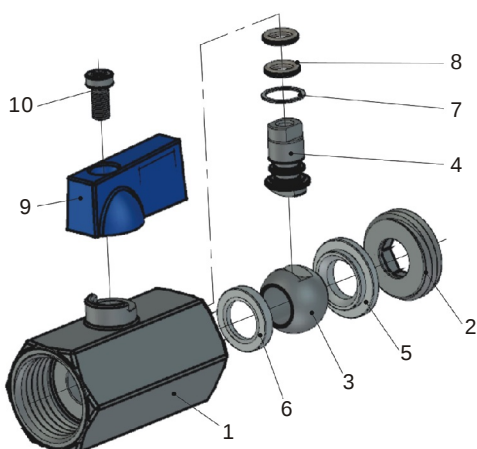


Valve Material Option: CF8/CF8M

Seal Material Option: PTFE/PTFE+15% Glass Fiber/PTFE+25%Carbon/TFM1600 and so on

Connection Option: Female/Female; Male/Male; Female/Male

No.	Item	Qty	Material	
			316	304
1	Body	1	A351-CF8M	A351-CF8
2	Cap	1	A182-F316	A182-F304
3	Ball	1	A182-F316	A182-F304
4	Stem	1	A276-316	A276-304
5	Seat A	1	PTFE/RPTFE/CTFE	
6	Seat B	1	PTFE/RPTFE/CTFE	
7	Gasket	1	PTFE	
8	O-ring	2	NBR/Viton	
9	Handle	1	A1	
10	Screw	1	304	

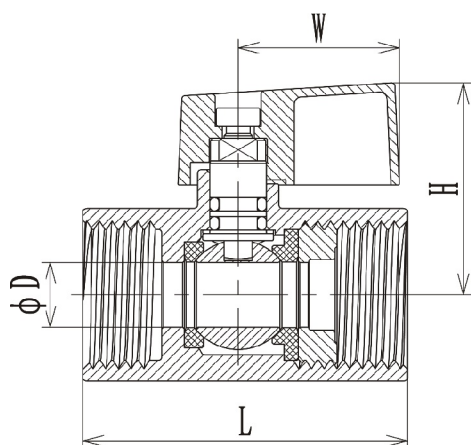

Size (In)	Dimension					
	D	H	W	L		
				F/F	M/M	F/M
1/8	0.197(0.276)	1.04	0.83	1.54	1.97	1.54
1/4	0.276	1.04	0.83	1.65	1.97	1.57
3/8	0.276	1.04	0.83	1.65	1.97	1.57
1/2	0.362	1.14	0.96	1.81	2.28	1.81
3/4	0.492	1.26	1.22	2.13	2.80	2.13
1	0.591	1.38	1.42	2.54	3.27	2.54

Q101N04 Series

Size (In)	Product Code					
	304 Female/Female	316 Female/Female	304 Male/Male	316 Male/Male	304 male/Female	316 male/Female
1/8	04Q101N04018	06Q101N04018	04Q102N04018	06Q102N04018	04Q103N04018	06Q103N04018
1/4	04Q101N04014	06Q101N04014	04Q102N04014	06Q102N04014	04Q103N04014	06Q103N04014
3/8	04Q101N04038	06Q101N04038	04Q102N04038	06Q102N04038	04Q103N04038	06Q103N04038
1/2	04Q101N04012	06Q101N04012	04Q102N04012	06Q102N04012	04Q103N04012	06Q103N04012
3/4	04Q101N04034	06Q101N04034	04Q102N04034	06Q102N04034	04Q103N04034	06Q103N04034
1	04Q101N04010	06Q101N04010	04Q102N04010	06Q102N04010	04Q103N04010	06Q103N04010