


Unit Inch

Size	A	B	G	C
1/8"	0.394	0.256	—	0.276
1/4"	0.453	0.291	—	0.354
3/8"	0.492	0.323	—	0.421
1/2"	0.571	0.394	0.157	0.551
3/4"	0.642	0.453	0.177	0.610
1"	0.768	0.520	0.197	0.787
1 1/4"	0.815	0.571	0.246	0.925
1 1/2"	0.846	0.634	0.315	1.110
2"	0.894	0.693	0.354	1.299
2 1/2"	1.083	0.756	0.344	1.488
3"	1.142	0.811	0.315	1.685
4"	1.232	1.012	0.384	2.236

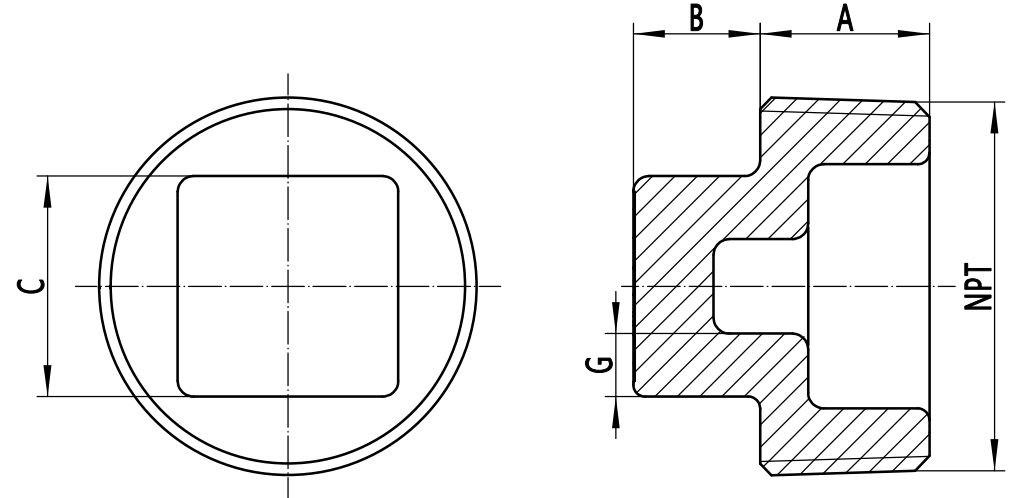

Dimensional Tolerance of Casting (GB/T6414-1999 CT-6)			
Size	0~0.394	0.394~0.630	0.630~0.984
Tolerance	±0.010	±0.0106	±0.0114
Size	0.984~1.575	1.575~2.480	2.480~3.937
Tolerance	±0.013	±0.014	±0.015
Size	3.937~6.299	6.299~9.843	9.843~15.748
Tolerance	±0.017	±0.020	±0.022

3.Casting parts Tolerance:Certified to GB/T6414-1999 CT-6

						Square Head Plug (Casting)				00SQ11X02							
														304/316			
Mark			File number	Signature	Date												
Drawn	Dong Ningkang	2020.3.17	Standardization			Edition	A	View Angle		Phase Marker				Product Standard			
Design	Dong Ningkang	2020.3.17				Weight		LTS	2:1					MS SP-114			
Reviewed						 GUARDIANMADE (VIETNAM) CO.,LTD											
Stand			Approve														