


Press Reducing Tee

Press x Press x Press | 15 Guardian SKUs | Dimensions in millimeters


CONSTRUCTION Copper	RAW MATERIAL STANDARD ASTM B75/B75M C12200 (TP2)
CONNECTION Press x Press x Press	CERTIFICATIONS NSF 372; NSF 61; IAPMO Z1117
MAXIMUM OPERATING PRESSURE 200 psi	OPERATING TEMPERATURE 0°-250 °F
SEAL / SERVICE EPDM / Potable water	

Engineering drawings

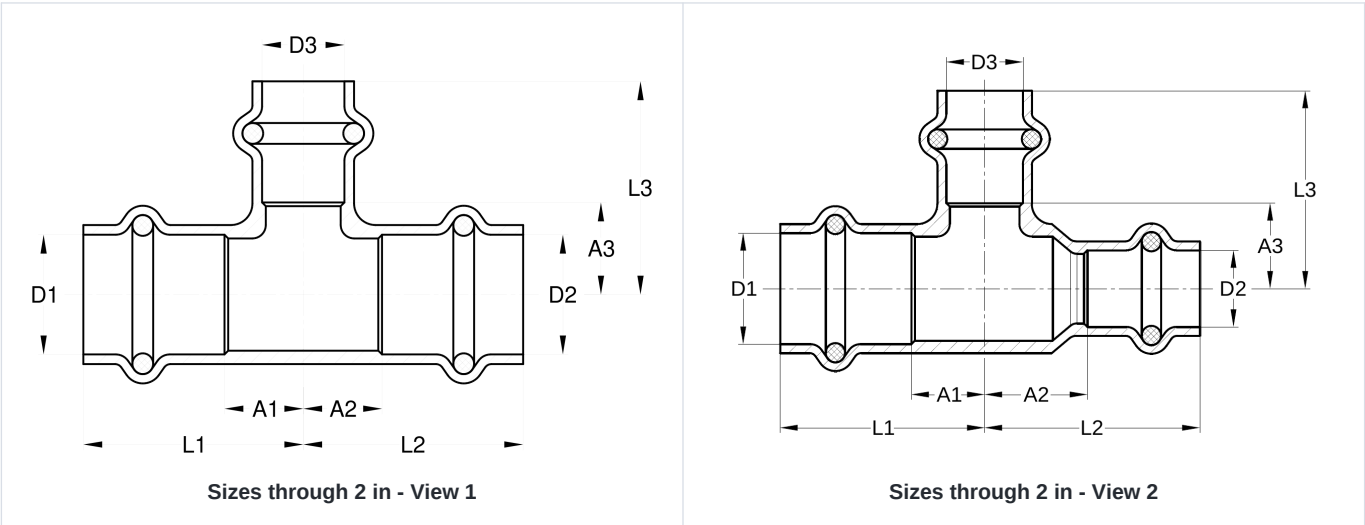

Press Reducing Tee

Additional engineering view

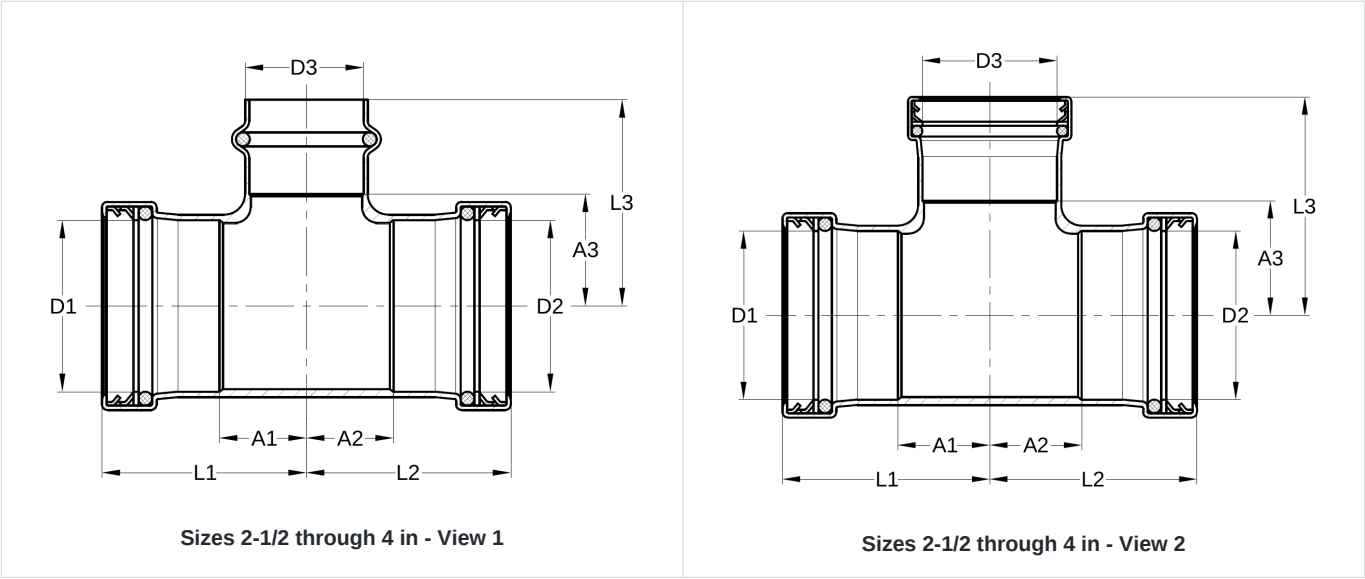

Press Reducing Tee

Sizes, Guardian SKUs, dimensions, and weights

Size	SKU	L1 (mm)	A1 (mm)	L2 (mm)	A2 (mm)	L3 (mm)	A3 (mm)	Weight (lb)
1" x 1" x 3/4"	C0RE3327	45.5	21.5	45.5	21.5	44	20	0.42
1-1/4" x 1-1/4" x 1/2"	C0RE4221	45	16	45	16	49	28.5	0.43
1-1/4" x 1-1/4" x 3/4"	C0RE4227	47.5	18.5	47.5	18.5	50	26	0.48
1-1/4" x 1-1/4" x 1"	C0RE4233	50.5	21.5	50.5	21.5	52	28	0.53
1-1/2" x 1-1/2" x 1"	C0RE4833	57.5	20.5	57.5	20.5	53	29	0.8
1-1/2" x 1-1/2" x 1-1/4"	C0RE4842	60.5	23.5	60.5	23.5	57	28	0.85
2" x 2" x 1"	C0RE6033	64.5	23.5	64.5	23.5	62	38	1.06
2" x 2" x 1-1/4"	C0RE6042	67.5	26.5	67.5	26.5	66	37	1.13
2" x 2" x 1-1/2"	C0RE6048	70.5	29.5	70.5	29.5	76	39	1.24
2-1/2" x 2-1/2" x 1/2"	C0RE7321	82	39	82	39	99	79.5	1.98
2-1/2" x 2-1/2" x 3/4"	C0RE7327	82	39	82	39	98.5	75.5	1.94
2-1/2" x 2-1/2" x 1"	C0RE7333	82	39	82	39	95.5	72.5	1.94
2-1/2" x 2-1/2" x 1-1/4"	C0RE7342	82	39	82	39	97	69	1.94
2-1/2" x 2-1/2" x 1-1/2"	C0RE7348	82	39	82	39	102	66	2.02
2-1/2" x 2-1/2" x 2"	C0RE7360	82	39	82	39	89	49	1.98