
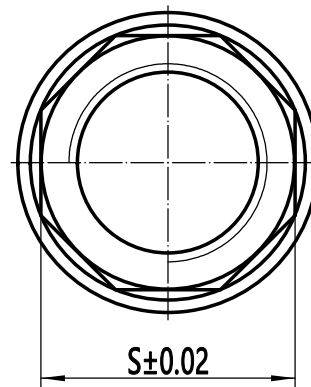


Other $\sqrt{6.3}$

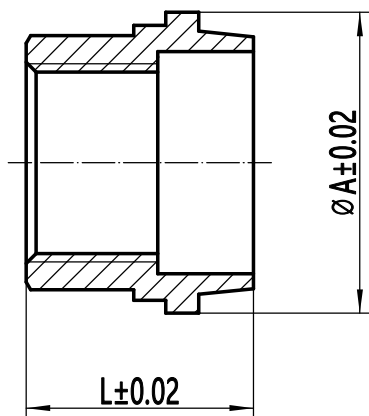

Drawing	Size	Dim.	A	L	S	Squares
UZFF1210602	1/8"		0.728	0.669	0.512	8
UZFF1220602	1/4"		0.925	0.787	0.689	8
UZFF1230602	3/8"		1.083	0.827	0.827	8
UZFF1240602	1/2"		1.201	0.925	1.004	8
UZFF1250602	3/4"		1.535	0.827	1.240	8
UZFF1260602	1"		1.752	1.102	1.516	8
UZFF1270602	1 1/4"		2.205	1.272	1.870	10
UZFF1280602	1 1/2"		2.461	1.350	2.146	10
UZFF1290602	2"		3.051	1.437	2.638	10
UZFF12A0602	2-1/2"		3.819	1.594	3.130	10
UZFF12B0602	3"		4.272	1.890	3.819	10
UZFF12C0602	4"		5.276	1.949	4.764	10

Technical Requirement

- 1.The material composition and quality requirements shall comply with ASTM A351 / A351M
- 2.Threads should be in accordance with ASME B1.20.1-1983
- 3.Refer to GB/ T 6414-1999 CT-6 for dimensional tolerance of product castings
- 4.Thread to be processed as per customer's order requirements.

DATE	2025.7.3	DRAWN	Tong He	PART NAME	1/8-4" UZFF 2#
TOLERANCE	L: ± 0.02	SCALE	1:1	MATERIALS	304/316
		JOB NO.		DRAWING NO.	UZFF12X0602

Guardian
PROTECTING YOUR FUTURE